



(323) 726-0888 • (800) 423-4366 • www.mgmtransformer.com

SPECIALTY PRODUCT BROCHURE

MGM Transformer Company Overview

With over forty years of transformer experience and our long-standing commitment to quality and customer service, MGM Transformer will design and build the transformer that is right for your specific application.

MGM provides custom built dry and or liquid filled High Rise transformers designed by industry leading, experienced engineers for the unique requirements of this specialty transformer. Our people, knowledge, and experience can provide a reliable, cost-effective transformer that will provide years of trouble free service



HIGH RISE TRANSFORMER

MGM has been building transformers for use in high rise buildings for over 4 decades. We have partnered with some of the largest utility companies in the country and have an extensive install base in many cities across the US.

The following information is a guide for a high-rise transformers along with the installation and system requirements from the manufacturer. Medium voltage distribution circuits (typically 15 kV to 25 kV) in high-rise buildings are used because they offer higher efficiency and lower cost. MGM Transformer's high-rise type transformers were developed specifically for these unique power distribution systems. In these systems, power circuits branch from the main high voltage bus to high-rise transformers which then step the voltage down to feed individual user's panels. Using a medium voltage main bus is less expensive than a standard low voltage bus which uses much larger cables and junction boxes. It also has lower losses and therefore offers superior voltage regulation and lower operating costs.

MGM Transformer's high-rise transformers having other options which make them even more desirable to the high rise use. MGM's units can have far lower dB levels than standard for quiet operation. Since the units are indoors the noise can become irritating to those inside the building but we can make the units 10 and sometimes 12db below NEMA standard to take care of that problem. Other options we can include would be high voltage bushings or bushing wells, incoming high voltage fuses with optional disconnecting means, provisions for lightning arresters, continuous overload capability, hinged panel access to high voltage compartment and an energy saving DOE 2016 efficient design. We can also include a special trip device designed to blow fuses and isolate the transformer in the event of a fire. Finally, these transformers are dry-type so there is no need to worry about the possibility of oil leaks. Dry types don't require special maintenance and they are simple to install. MGM Transformer's high-rise transformers are the perfect power transformer solution for high-rise condominiums, apartments, office or other similar buildings.

Scope and Application

This specification covers medium voltage single and three phase, ventilated self-cooled dry-type dead-front distribution transformers specifically designed for indoor installation in high-rise apartment, condo or office buildings.

Applicable Industry Standards

- IEEE C57.12.01 - IEEE Standard for General Requirements for Dry-Type Distribution and Power Transformers
- IEEE C57.12.91 - IEEE Standard Test Code for Dry-Type Distribution and Power Transformers

Design Requirements

Standard Transformer Ratings

Phase	1 or 3
Frequency	60 Hz
Primary Voltage	Up to 15 kV
Primary Basic Impulse Level (BIL)	60 kV, 95 kV or 110 kV
Secondary Voltage	600 V Class
Connections	Single, Delta or Wye as applicable
Secondary Basic Impulse Level (BIL)	10 kV
Temperature Rise	80°C, 115°C, 150°C
Conductor	Aluminum or Copper
Impedance	4% to 7%
Ambient Temperature	30°C 24 hour average, 40°C maximum

Voltage Taps

Standard voltage taps are +2, -2 x 2.5%, however, other configurations are available.

Transformer Details

The transformer is a ventilated, open wound VPI dry-type. The coils are cooled by natural circulation of air through the windings.


The insulation system for the transformer windings is a UL® listed 220°C (Class R). Winding layer insulation is DuPont Nomex®.

The core is constructed of non-aging, high permeability grain oriented silicon steel. All core laminations shall be step-lap mitered cut, free of burrs and stacked without gaps. The core framing structure is of rigid construction to provide full clamping pressure upon the core and provide the support points for the coils. Coils are adequately braced for full short circuit capability.

The core and coil are supported by vibration isolation pads to effectively dampen vibration transferred to the transformer enclosure.

Transformer coils undergo a vacuum pressure impregnation process to eliminate air voids within the windings using a high build polyester resin.

Upon placement of coils on the core legs, the top core yoke is stacked, the core is tightly clamped and all necessary leads are connected to the bus components for customer connections. Protective coatings for the core and metal bracing components are applied.

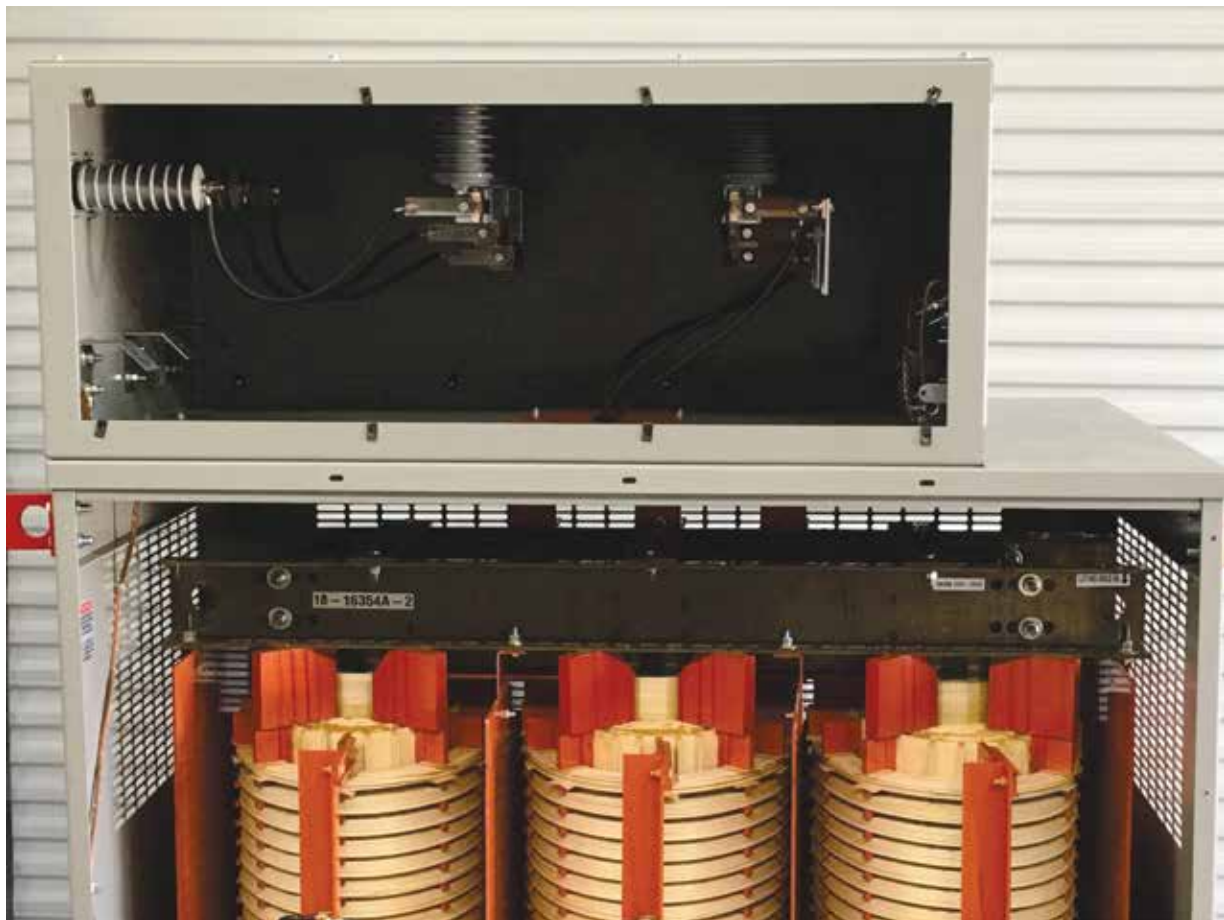

Enclosure

The enclosure includes provisions for rolling, skidding, lifting, and jacking for installation. All parts of the cabinet are made with at least a 12 gauge thickness. The bottom plate has openings to allow air in but they're small enough to prevent rodents from entering. The front and rear panels have handles for easy removal. Side panels have cutout openings for cable entrance. Two

cover plates are provided for the openings. Lifting provisions are made of corrosion resistant material and so arranged to provide a suitably balanced lift for the completely assembled unit.

The top section serves as the high voltage compartment door used to access fuses, arresters, shorting switches and internal bushing well connections.

Our state of the art powder coat paint finish is apparent on all our enclosures. Enclosure parts are painted with electrostatically applied polyurethane powder coat paint then baked for optimum hardness and finish. Paint color standards are ANSI 61 or ANSI 49 however we can customize to your order and paint in any custom colors desired.

Grounding

A 2 inch stainless steel grounding is installed on the outside of the side panels above each of the cable knockouts openings. Each pad is provided with two holes horizontally spaced on 1-3/4" centers and tapped for 1/2"-13 NC thread. Internal connection (by removable strap or cable of #4/0 copper capacity) is made from the core frame to either case grounding pad.

Bushings

The high voltage is supplied with 200 amp bushings with removable stud on each ungrounded phase. Bushing are installed with a keeper plate / clamping ring furnished with grounding provisions. Bushing wells are installed in a top mounted removable fuse chamber for three-phase units and in the top fuse compartment section for single-phase units.

Low Voltage Terminals

The secondary is terminated with tinned spade type terminations sized to carry maximum nameplate loads. Terminals are located near the front of the enclosure at the base of the core and coil assembly in a horizontal configuration. Terminals have a minimum air clearance of 1.5 inches to the front panel.

The terminals are vertically offset from one another as much as possible but no less than 2 inches. The uppermost terminal is vertically positioned no less than 8 inches from the top edge of the lower panel.

Nameplate

Nameplate is anodized aluminum with ratings shown as required in IEEE C57.12.01.

Stenciling or Labeling

The following special labeling is required, except as noted, in addition to standard markings and labeling in accordance with IEEE standards.

1. Catalog ID (optional)
2. Shipping detail instructions where applicable
3. The fuse symbol is displayed on the fuse access panel. Below the symbol, stencil "DANGER - De-energize this transformer before opening or removing this panel or operating the fuse".

Accessories

A thermally operated spring shorting switch is installed in the fuse compartment on the enclosure for each ungrounded phase in a manner which insures positive grounding of the load side of the fuse clip when the thermal switch is actuated. The thermal shorting switch assembly is shipped from the factory with the fusible link disengaged. Three phase shorting switches are designed to mechanically trigger all three switches simultaneously. A bare #2 copper ground wire shall be installed connecting the shorting switch to the ground bus or terminal.

Primary high voltage fast clearing current limiting type fuses are located horizontally in the upper fuse compartment for over-current protection. Three phase transformer fuse compartments are removable. Fuses may be “clip-style” or incorporate load-breaking capability. Fuse ratings are to be specified by the customer to meet system and code requirements.

Mounting provisions for distribution class surge arresters are provided in the upper fuse compartment.

Performance

The transformer efficiency must meet or exceed the latest U.S. Department of Energy regulations for dry-type transformers in 10 CFR 431.196 computed at 50% load and 75°C.

Transformer sound levels do not exceed those given in table 2 as laboratory tested per IEEE C57.12.91. Table 2 - Maximum Sound Levels

Single Phase (15 - 500 KVA) : 45 dBA

Three Phase (30- 500 KVA) : 50 dBA (for lower dB levels, please consult factory)

Transformers are capable of continuous overloads in accordance with the table below without exceeding the temperature limits of the insulation system. Overload ratings are identified on the nameplate.

Temperature Rise: 80°C / 115°C

Overload: 130% / 115%

Quality Assurance

Quality System

The manufacturing facility is an ISO 9001:2015 registered facility.

Testing

The following tests are performed on each transformer in accordance with IEEE C57.12.91.

1. Resistance	7. Induced voltage
2. Ratio	8. Insulation resistance (Megger)
3. Polarity and phase relation	9. Partial discharge
4. No load loss and excitation current	10. QC Impulse (50% & 100% full wave)
5. Impedance voltage and load loss	11. Sound level
6. Applied voltage (Hipot)	

Final Test Reports in the proper IEEE format will be furnished for each unit upon request.

Transformers are wrapped in a weatherproof covering as required and mounted on suitable skids. All temporary shipping hardware and brackets are painted red for ease of identification for future removal. Instruction manuals are shipped with each transformer.

THE BETTER CHOICE!

MGM is a leader in the transformer industry and a premiere manufacturer capable of fulfilling the most demanding applications. **No one can provide a wider range of products and solutions than MGM!**

MGM Transformer Company - Product Catalogs

MGM TRANSFORMER COMPANY

ISO 9001 CERTIFIED

Special Design Dry Type Transformers
Liquid Filled and Dry Type Substation Transformers
Liquid Filled and Dry Type Drives Isolation Transformers
600V Class General Purpose Transformers
Low Voltage Custom Transformers

MGM TRANSFORMER COMPANY

ISO 9001 CERTIFIED

600 V Class, Dry Type, General Purpose Distribution Transformers

BULLETIN 10

MGM TRANSFORMER COMPANY

ISO 9001 CERTIFIED

Custom 600 V Class, Dry Type General Purpose Distribution Transformers

BULLETIN 15

MGM TRANSFORMER COMPANY

ISO 9001 CERTIFIED

Dry Type Substation Transformers

BULLETIN 30

MGM TRANSFORMER COMPANY

ISO 9001 CERTIFIED

Liquid-Filled Secondary Substation Transformers

BULLETIN 40

MGM TRANSFORMER COMPANY

ISO 9001 CERTIFIED

MGM Transformer Company Overview

With over forty years of transformer experience and our long standing commitment to quality and customer service, MGM Transformer will design and build the transformer that is right for your specific application.

MGM provides custom built dry type transformers designed by industry leading, experienced engineers for the unique requirements of Auto transformers. Our people, knowledge, and experience can provide a reliable, cost-effective transformer that will provide years of trouble free service.

Application

As explained by the figure, an auto transformer has the ability to supply a varying secondary voltage to the externally connected load. So this is mostly used in applications where various voltage outputs are required. Some of its applications are listed below:

- It is used in electronic testing centers where continuously varying voltage supplies are required.
- All power line power stations adjust voltage to step down the voltage, then increase it to match the voltage required by the device at the receiving end.
- For motor starting applications.

AUTO TRANSFORMER

MGM TRANSFORMER COMPANY

ISO 9001 CERTIFIED

MGM Transformer Company Overview

With over forty years of transformer experience and our long standing commitment to quality and customer service, MGM Transformer will design and build the transformer that is right for your specific application.

MGM provides custom built dry type transformers for the Electric Vehicle (EV) charging industry, designed by industry leading, experienced engineers for the unique requirements of EV charging stations. Our people, knowledge, and experience can provide a reliable, cost-effective transformer that will provide years of trouble free service.

Application

There is no doubt that the trend towards EV's here to stay. Motorists who purchase such a vehicle also need a charging station. The total number of electrically powered cars worldwide reached some 3.2 million in early 2012. That's a 55% increase over the previous year. The figure includes all the vehicles charged with electricity, such as plug-in hybrids.

ELECTRIC VEHICLE CHARGING

MGM TRANSFORMER COMPANY

ISO 9001 CERTIFIED

MGM Transformer Company Overview

With over forty years of transformer experience and our long standing commitment to quality and customer service, MGM Transformer will design and build the transformer that is right for your specific application.

MGM provides custom built dry and or liquid filled grounding transformers designed by industry leading, experienced engineers for the unique requirements of this specialty transformer. Our people, knowledge, and experience can provide a reliable, cost-effective transformer that will provide years of trouble free service.

Purpose

Simply put, a grounding transformer is used to provide a ground path to either an ungrounded "Y" or a delta connected system and is used to:

- Provide a relatively low impedance path to ground, thereby maintaining the system neutral at or near ground potential.
- Limit the magnitude of transient over voltages when re-energizing ground faults occur.
- Provide a source of ground fault current during line to ground faults.
- Permit the connection of phase to neutral loads if desired.

If a single line to ground fault occurs on an ungrounded or isolated system, no return path exists for the fault current, thus no current flows. The system will continue to operate but the other two un-faulted lines will rise in voltage by the square root of 3 resulting in overvoltage of the transformer insulation, and other associated components on the system, by 275%.

GROUNDING TRANSFORMER

MGM TRANSFORMER COMPANY

ISO 9001 CERTIFIED

MGM Transformer Company Overview

With over forty years of transformer experience and our long standing commitment to quality and customer service, MGM Transformer will design and build the transformer that is right for your specific application.

MGM provides custom built dry and or liquid filled transformers for the Traction industry, designed by industry leading, experienced engineers for the unique requirements of Traction duty transformers. Our people, knowledge, and experience can provide a reliable, cost-effective transformer that will provide years of trouble free service.

Application

Traction used transformers are critical components in the traction chain, affecting both train performance and operator services. MGM supplies traction substation transformers for all applications.

- High speed, commuter and regional trains.
- Transit/Traction - In general, electricity is distributed along tracks as DC current. Converted to AC to drive motors. 500VAC - 1500VAC is typical range.

These transformers are typically located in either indoor or outdoor traction substations.

TRACTION DUTY

MGM TRANSFORMER COMPANY

ISO 9001 CERTIFIED

MGM Transformer Company Overview

With over forty years of transformer experience and our long standing commitment to quality and customer service, MGM Transformer will design and build the transformer that is right for your specific application.

MGM provides custom built dry transformers for Triplex applications, designed by industry leading, experienced engineers for the unique requirements of Traction duty transformers. Our people, knowledge, and experience can provide a reliable, cost-effective transformer that will provide years of trouble free service.

Application

A triplex transformer is composed of three separate single phase transformers which are banked and connected directly together to form a single three phase unit in a common enclosure. While slightly larger than a dedicated three phase unit a triplex design can be broken down into three significantly smaller and lighter components when there are size and/or weight restrictions for transporting the transformer. These are often used in mining or high rise building installations where the unit must be transported in an elevator.

TRIPLEX TRANSFORMER

MGM TRANSFORMER COMPANY

ISO 9001 CERTIFIED

MGM Transformer Company Overview

With over forty years of transformer experience and our long standing commitment to quality and customer service, MGM Transformer will design and build the transformer that is right for your specific application.

MGM provides custom built dry and or liquid filled high rise transformers designed by industry leading, experienced engineers for the unique requirements of this specialty transformer. Our people, knowledge, and experience can provide a reliable, cost-effective transformer that will provide years of trouble free service.

HIGH RISE TRANSFORMER

MGM TRANSFORMER COMPANY

ISO 9001 CERTIFIED

MGM Transformer Company Overview

With over forty years of transformer experience and our long standing commitment to quality and customer service, MGM Transformer will design and build the transformer that is right for your specific application.

MGM provides custom built dry and or liquid filled transformers specifically for the mining industry, designed by industry leading experienced engineers for the unique requirements of mine duty transformers. Our knowledgeable staff, manufacturing standards and experience will provide a reliable, cost-effective transformer that will provide years of trouble free service.

Application

The mining industry requires many different types of Power Transformers, the need for high power in a compact robust transformer make these units unique to the industry. Examples include:

- Above/Below Ground Application
- Headage Equipment
- Mining Distribution
- Low Profile Power Centers
- Multiple Input and/or Output Voltages
- Power Distribution
- Continuous Miners
- Low Profile Mining Transformers
- Longlead Transformers
- Special Environmental

MINING TRANSFORMER



5701 Smithway Street, Commerce, CA 90040

Tel: (800) 423-4366

Fax: (323) 726-8224

Email: sales@mgmtransformer.com

www.mgmtransformer.com