

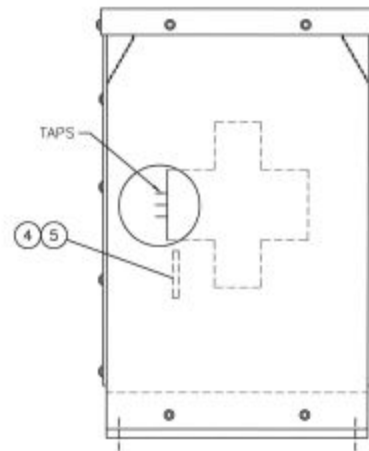


REFERENCE  
ONLY

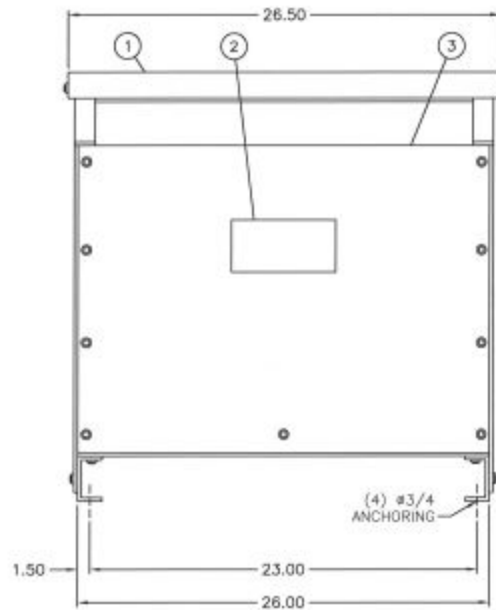

LEGEND

ITEM	QTY	DESCRIPTIONS
1	1	TOP COVER - REMOVABLE
2	1	DIAGRAMATIC NAMEPLATE
3	2	FRONT & REAR PANEL - REMOVABLE
4	3	HV TERMINAL
5	4	LV TERMINAL

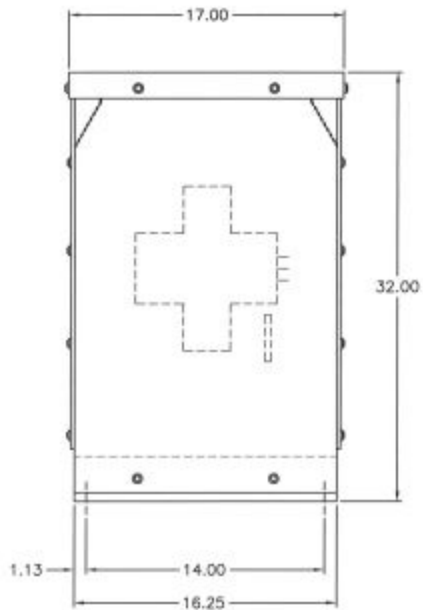

HT30A3B1-D16

S.O. NO.:	DWG FOR: <input checked="" type="checkbox"/> RECORD <input type="checkbox"/> APPROVAL <input type="checkbox"/> QUOTE
CUST/JOB NAME:	-
CUST ORDER NO.:	-
SERIAL NO.:	-
ID TAG:	-
<p style="text-align: center;">KVA: 30</p> <p>HIGH VOLTAGE: 480 DELTA</p> <p>LOW VOLTAGE: 208Y/120</p> <p>HV TAPS: 2A4B @ 2 1/2%</p> <p>HV-KV BIL: 10</p> <p>LV-KV BIL: 10</p> <p>PHASE: 3</p> <p>FREQ-HZ: 60</p> <p>TEMP RISE-°C: 150</p> <p>COOLING CLASS: AA</p> <p>INSULATION CLASS: 220°C</p> <p>WINDING COND: COPPER</p> <p>PAINT/COATING: ANSI 61 GRAY</p> <p>APPRX WT-LBS/KGS: 350/159</p>	
<input type="checkbox"/> STANDARD <input checked="" type="checkbox"/> DOE 10CFR <input type="checkbox"/> K1 <input type="checkbox"/> K4 <input type="checkbox"/> K13 <input type="checkbox"/> K20	

- NOTES:**
- 1) TRANSFORMERS ARE MANUFACTURED AND TESTED PER APPLICABLE ANSI, NEMA AND IEEE STDS, LATEST REVISION.
  - 2) UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE IN INCHES WITH ± 1/4" TOLERANCE.
  - 3) TRANSFORMER IS UL & CSA LISTED AND LABELED.
  - 4) DOE 2016, 10CFR 431 EFFICIENCY - 30 KVA TRANSFORMER MEET OR EXCEED EFFICIENCY = 98.23% @ 75°C @ 38% LOAD.
  - 5) TRANSFORMER IS DESIGNED FOR INDOOR (NEMA 1) AND OUTDOOR (NEMA 3R) APPLICATION.
  - 6) TRANSFORMER NOT TO BE INSTALLED IN PUBLIC ACCESS AREAS OTHERWISE IT MUST BE FENCED OR ISOLATED.

PAGE 1 OF 1	SCALE: NONE	TITLE: TRANSFORMER OUTLINE DRY TYPE GENERAL PURPOSE, CASE B	<input checked="" type="checkbox"/> OUTDOOR <input type="checkbox"/> INDOOR
BY:	DATE:	<p><b>MGM TRANSFORMER CO.</b> CITY OF COMMERCE, CALIFORNIA TEL: (626) 788-0000, FAX: (626) 788-8188</p>	CAD NO. <b>MG00030N3-16-30YSC</b>
CADD: HM	02/16/17		REV.
CHKD: AH	02/16/17		
APPD: <i>A-G</i>	2/22/17		
REVISIONS			